

Floodline 2

FloodLine 2-325 gry diff 11W LED 3000K

0049464



Range Features

- 11W, 22W and 31W LED luminaires
- LED white version with 3,000K and sandblasted front glass for homogenous light distribution
- LED RGB version for DMX-control with different lens optics for different effects
- Integrated electronic drivers
- High protection class: IP65
- Heavy-duty die-cast housing: IK08
- Linear symmetric light distribution
- Adjustable light angle thanks to its tiltable base
- 3 lengths:- 325mm = 11W- 615mm = 22W- 900mm = 31W
- For base mounting
- Provision for through-wiring as standard on Floodline 1 & 2
-



PRODUCT OVERVIEW

Certifications	Warranty
Colour	Aluminium grey
EAN code	5410288494647
Housing	Die-cast aluminium
IK rating	IK08
IP rating	IP65
Watt (Nominal) (W)	11
Lamps	LED 9W 3000K
LOR (%)	99
Mount	Surface mounted
Ordering number	0049464
Technology	LED
Voltage (V)	230
Included lamp	Integrated LED
Compatible with bulbs of energy class:	A++ A+ A

DATA TABLE

General data

Average life (Nominal) (h)	50,000 hrs
Certifications	Warranty
EAN code	5410288494647
Environment	Exterior
General application	Logistics and Industry; Retail
Housing	Die-cast aluminium

Floodline 2

FloodLine 2-325 gry diff 11W LED 3000K

0049464

Mount	Surface mounted
Ordering number	0049464
Range features	11W, 22W and 31W LED luminaires LED white version with 3,000K and sandblasted front glass for homogenous light distribution LED RGB version for DMX-control with different lens optics for different effects Integrated electronic drivers High protection class: IP65 Heavy-duty die-cast housing: IK08 Linear symmetric light distribution Adjustable light angle thanks to its tiltable base 3 lengths:- 325mm = 11W- 615mm = 22W- 900mm = 31W For base mounting Provision for through-wiring as standard on Floodline 1 & 2
Product name	FloodLine 2-325 gry diff 11W LED 3000K
Specific application	Bridges Buildings Façade lighting Harbours Industrial Loading Bays Outdoor Parking Parks Street
Technology	LED
Sales pack quantity	1
E-number FI	4578863
Compatible with bulbs of energy class:	A++ A+ A

Physical data


Colour	Aluminium grey
Diffuser finish	Satin
Diffuser material	Glass
Emergency	Without
Height (mm)	94
IK rating	IK08
IP rating	IP65
Lamp included	Integrated
Length (mm)	325
Reflector finish	Satin
Reflector material	Aluminium
Safety distance	200
Vertical tilt (°)	90°
Weight (kg)	1.70
Width (mm)	75
Included lamp	Integrated LED
Outer package dimensions (L x W x H) (cm)	43.50 x 32.80 x 31.60
Single package dimensions (L x W x H) (cm)	42.50 x 15.40 x 14.80

Floodline 2


FloodLine 2-325 gry diff 11W LED 3000K

0049464


SYLVANIA
0049464




This luminaire contains built in LED lamps.

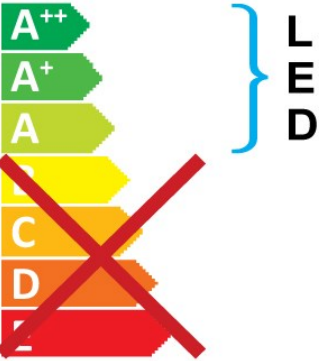


The lamps cannot be changed in the luminaire.


874/2012




This luminaire contains built in LED lamps.



The lamps cannot be changed in the luminaire.

SYLVANIA
0049464

874/2012